



# ITT

**BPROPAKRJ**

Residential Water Systems

## Red Jacket Water Products

### 30-80 Hz ProPak Kits



#### FEATURES

- Simple, fast sizing and installation.
- Range curves and selection charts generated from actual R&D tests.
- Kits configured for 30 Hz minimum and 80 Hz maximum operation.
- Kits use mismatched water end and motor (see component chart).
- Wiring is as easy as standard three-wire control box:
  - L1, L2 and Ground in from power supply
  - Red, Yellow, Black and Ground out to motor
- Pressure is factory preset at 50 psi with simple, fast, field adjustability for higher pressures.
- Three phase output to motor reduces wire cost.
- *New* – Switch Input for connecting a pressure switch or float switch.
- *New* – Grounding provisions for transducer and transducer cable.

#### KITS INCLUDE:

- CentriPro Three Phase Motor 1.5 – 5 HP, 230 V
- CentriPro Balanced Flow® Controller with Transducer
- Enduro Water End (pump)

**ProPak kits do not include pressure tanks, order tanks separately.**



Red Jacket Water Products is a brand of ITT Corporation.

[www.redjacketwaterproducts.com](http://www.redjacketwaterproducts.com)

*Engineered for life*

### PROPAK PERFORMANCE RANGE AND COMPONENTS

MODEL	HP	Shut-Off Head (ft)	at Best Efficiency		at Maximum Runout		WE	Motor	Controller
			Flow (GPM)	TDH (ft)	Flow (GPM)	TDH (ft)			
12RP1020	2	700	12	380	16	218	12S14	200C313	BF20
20RP1020		450	20	262	27	115	20S8		
12RP1530	3	900	12	485	16	280	12S18	300C313	BF30
20RP1530		620	20	350	27	140	20S11		
25RP1531		552	25	287	35	173	25S10		
20RP3050	5	1040	20	540	27	200	20S19	500C313	BF50
25RP3050		873	25	482	35	293	25S17		

Order pressure tank separately, not included in kit

### BALANCED FLOW® CONTROLLER – NEW FEATURES

New, more versatile user interface board

- Provides switch connection for optional pressure or level switch
- New current limit settings for all new CentriPro motors
- Dry well sensitivity switch
- Broken pipe protection
- 5 or 20 PSI pressure drop restart switch
- Transducer better protected from transient power surges

### PROPAK KIT DIMENSIONS AND WEIGHTS

Controller	Sh. Weight (lb)	Dimensions - All
BF20	23	Height: 21"
BF30	24	Width: 13"
BF50	29	Depth: 8"

Motors	Sh. Weight (lb)	Motor Length (in)	L x W x H (in)
200C313	28	13.8	20.5 x 6.5 x 6.5
300C313	32	15.3	20.5 x 6.5 x 6.5
500C313	55	21.7	27.5 x 6.5 x 6.5

Pump	Sh. Weight (lb)	W. E. Length (in)
12S14	11	19.3
20S8	8	13.8
12S18	13	23.7
20S11	9	16.6
25S10	9	17.6
20S19	15	24.6
25S17	15	26.0

#### ProPak Carton Dimensions and Weights


Kit No.	Sh. Weight (lb)	No. cartons	L x W x H (in)
12RP1020	64	1	33.9 x 21.4 x 11.5
20RP1020	61	1	
12RP1530	71	1	
20RP1530	67	1	
25RP1530	67	1	
20RP3050	101	2 ①	
25RP3050	101	2 ①	

① The 5 HP units have the controller and pump in one carton and the motor is shipped separately due to weight. See 500C313 for motor weight and dimensions.

## MODEL 12S14 30–80 Hz with 2 HP Motor and BF20

### SELECTION CHART


Pump Model	PSI	Depth to Water in Feet/Ratings in GPM (Gallons per Minute)																				
		80	100	120	140	160	180	200	220	240	260	280	300	340	380	420	460	500	540	580	620	660
12S14	0								15.9	15.6	15.2	14.8	14.3	13.2	11.7	10.6	9.2	7.9	6.8	5.7	4.7	3.4
	50			15.9	15.4	14.8	14.2	13.6	13.0	12.4	11.8	11.2	10.7	9.5	8.4	7.3	6.1	4.7	3.2			
	60		15.8	15.3	14.7	14.1	13.5	12.9	12.3	11.7	11.1	10.6	10.0	8.9	7.8	6.6	5.3	3.9				
	70	15.8	15.2	14.6	14.0	13.4	12.8	12.2	11.6	11.1	10.5	9.9	9.4	8.2	7.1	5.9	4.5					
Shut-off PSI		269	260	252	243	234	226	217	208	200	191	182	174	156	139	122	104	87	70	53	35	18

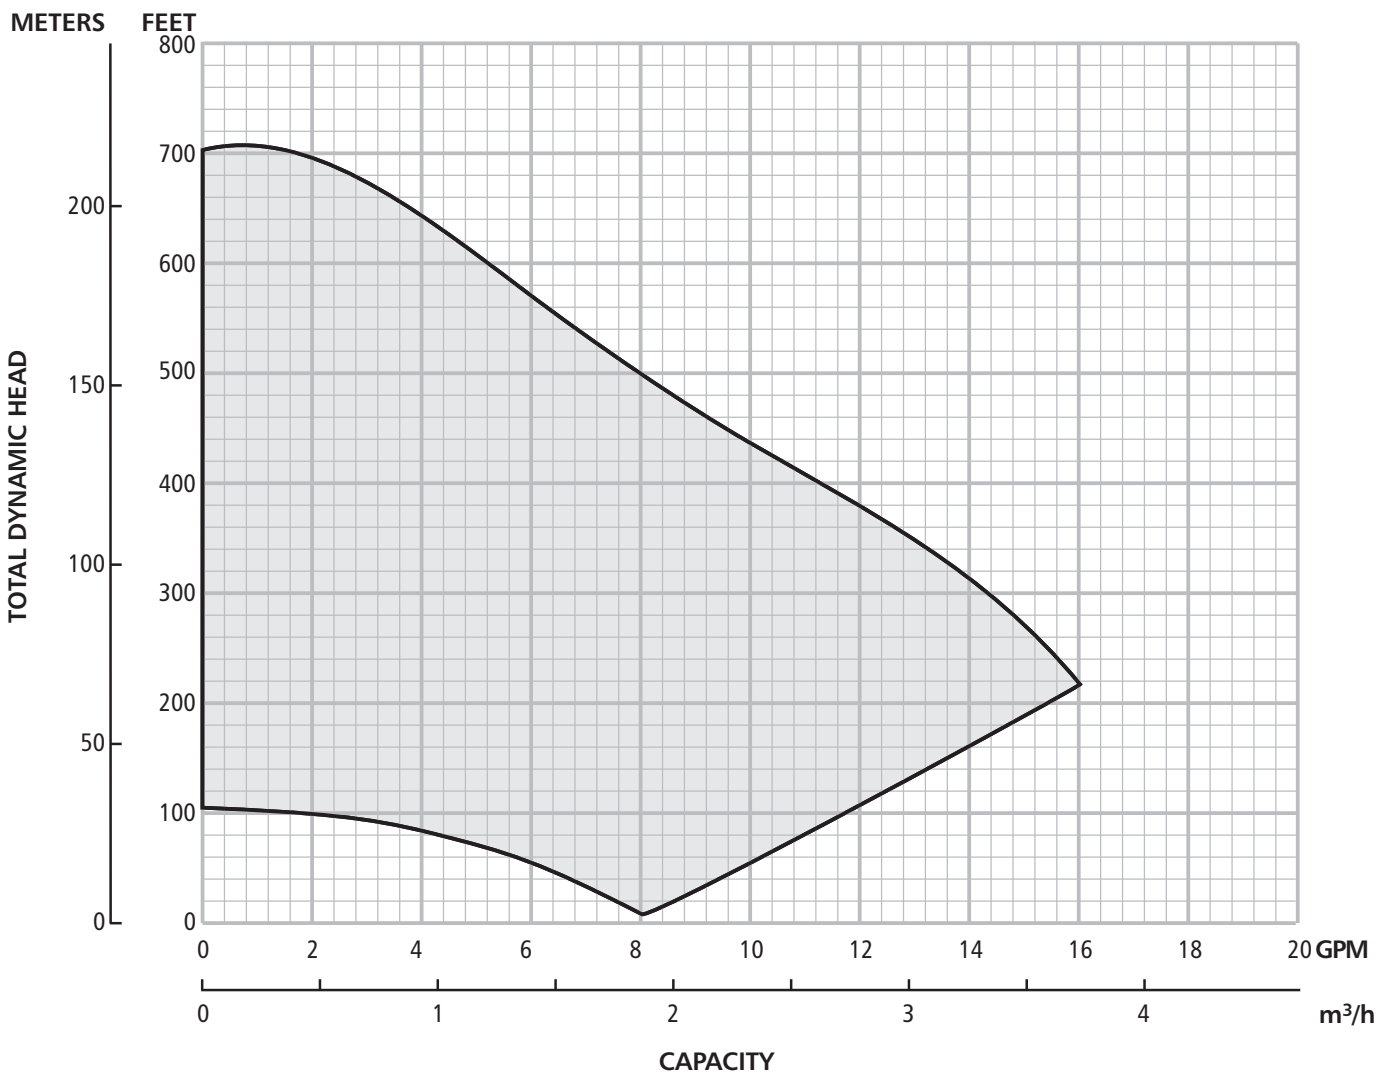

## MODEL 12S18 30–80 Hz with 3 HP Motor and BF30

### SELECTION CHART


Pump Model	PSI	Depth to Water in Feet/Ratings in GPM (Gallons per Minute)																					
		140	160	180	200	220	240	260	280	300	340	380	420	460	500	540	580	620	660	700	740	780	820
12S18	0								16.0	15.8	15.2	14.6	13.8	12.9	11.9	10.8	9.7	8.8	7.8	6.9	5.9	5.1	4.2
	50			15.9	15.6	15.2	14.8	14.4	13.9	13.5	12.7	11.8	10.9	10.1	9.2	8.3	7.4	6.4	5.4	4.1			
	60		15.9	15.5	15.1	14.7	14.3	13.9	13.4	13.0	12.2	11.3	10.5	9.6	8.7	7.8	6.9	5.8	4.7	3.4			
	70	15.8	15.4	15.0	14.6	14.2	13.8	13.4	13.0	12.5	11.7	10.8	10.0	9.1	8.2	7.3	6.3	5.2	3.9				
Shut-off PSI		331	322	313	305	296	287	279	270	261	244	227	209	192	175	158	140	123	106	88	71	54	36

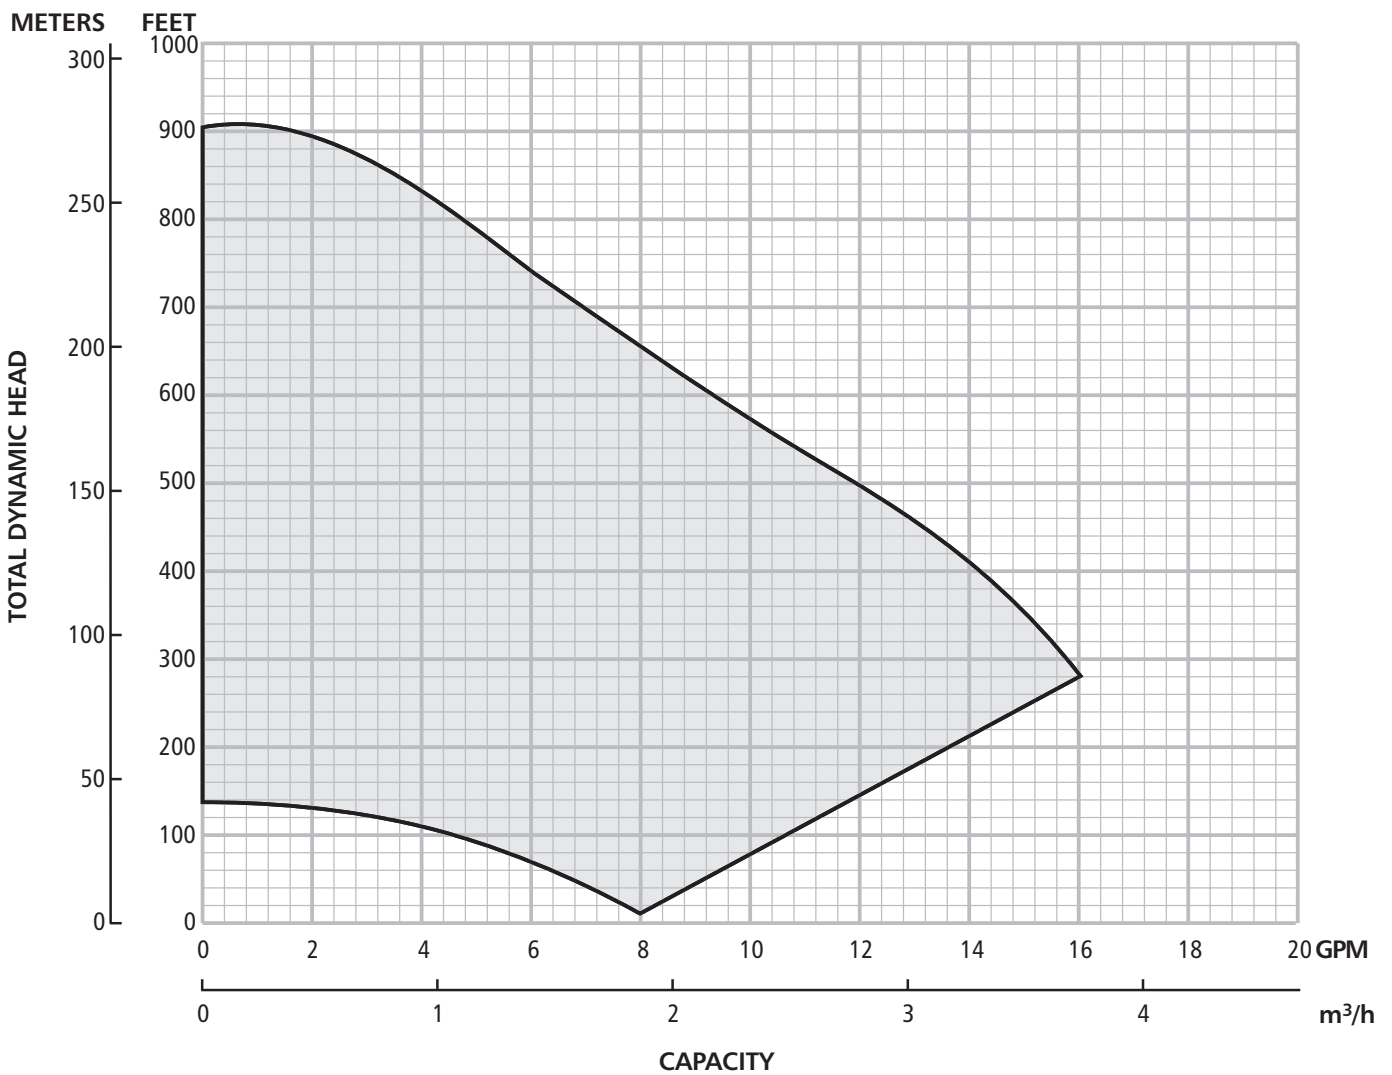

## MODEL 20S8 30–80 Hz with 2 HP Motor and BF20

### SELECTION CHART


Pump Model	PSI	Depth to Water in Feet/Ratings in GPM (Gallons per Minute)																
		20	40	60	80	100	120	140	160	180	200	220	240	260	280	300	340	380
20S8	0						26.8	26.1	25.3	24.4	23.5	22.4	21.3	20.0	18.8	17.5	14.7	9.7
	50	26.6	25.5	24.4	23.3	22.2	21.1	20.1	19.1	18.0	16.9	15.7	14.4	12.8	10.9	8.5		
	60	25.3	24.2	23.1	22.0	21.0	19.9	18.9	17.9	16.7	15.5	14.1	12.5	10.5	8.1			
	70	24.0	22.9	21.8	20.8	19.8	18.7	17.7	16.6	15.3	13.9	12.2	10.2	7.7				
Shut-off PSI		186	177	168	160	151	142	134	125	116	108	99	90	82	73	64	47	30

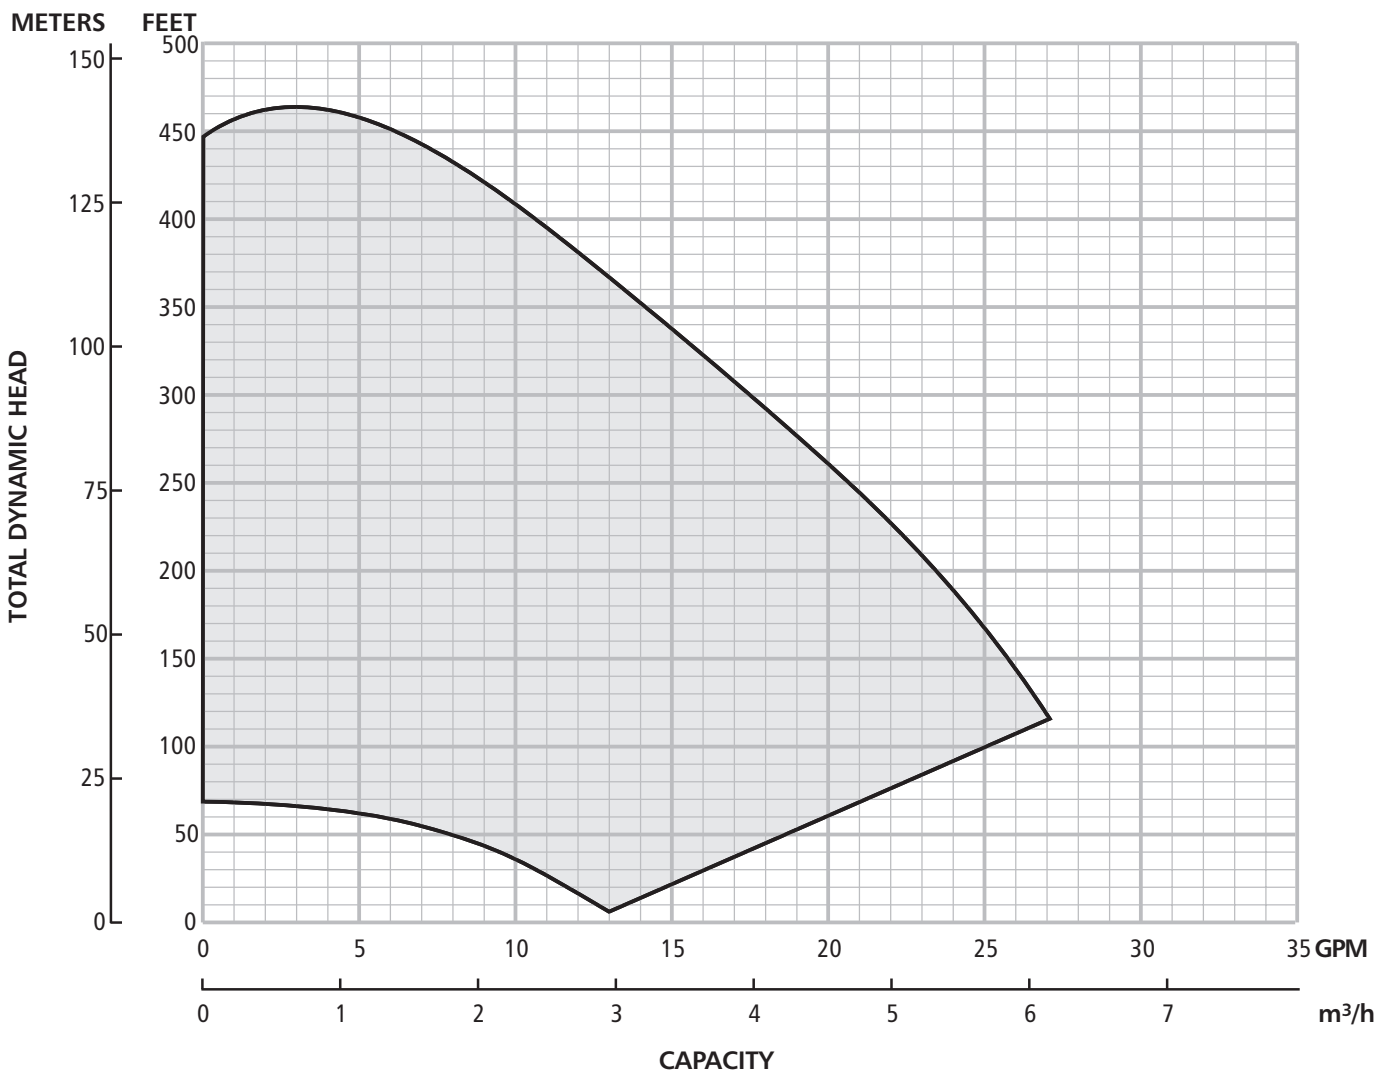

## MODEL 20S11 30–80 Hz with 3 HP Motor and BF30

### SELECTION CHART


Pump Model	PSI	Depth to Water in Feet/Ratings in GPM (Gallons per Minute)																					
		20	40	60	80	100	120	140	160	180	200	220	240	260	280	300	340	380	420	460	500	540	580
20S11	0							27.0	26.5	26.1	25.5	24.9	24.3	23.7	22.9	22.2	20.5	18.6	16.9	14.8	12.7	10.8	8.6
	50			26.7	25.9	25.1	24.2	23.4	22.6	21.8	21.0	20.3	19.5	18.8	18.1	17.3	15.7	13.8	11.3	8.0			
	60		26.6	25.8	24.9	24.1	23.3	22.5	21.7	20.9	20.1	19.4	18.7	17.9	17.2	16.4	14.6	12.4	9.5				
	70	26.5	25.6	24.8	24.0	23.1	22.3	21.5	20.8	20.0	19.3	18.6	17.8	17.1	16.3	15.4	13.4	10.8	7.4				
Shut-off PSI		259	250	241	233	224	215	207	198	189	181	172	164	155	146	138	120	103	86	68	51	34	16

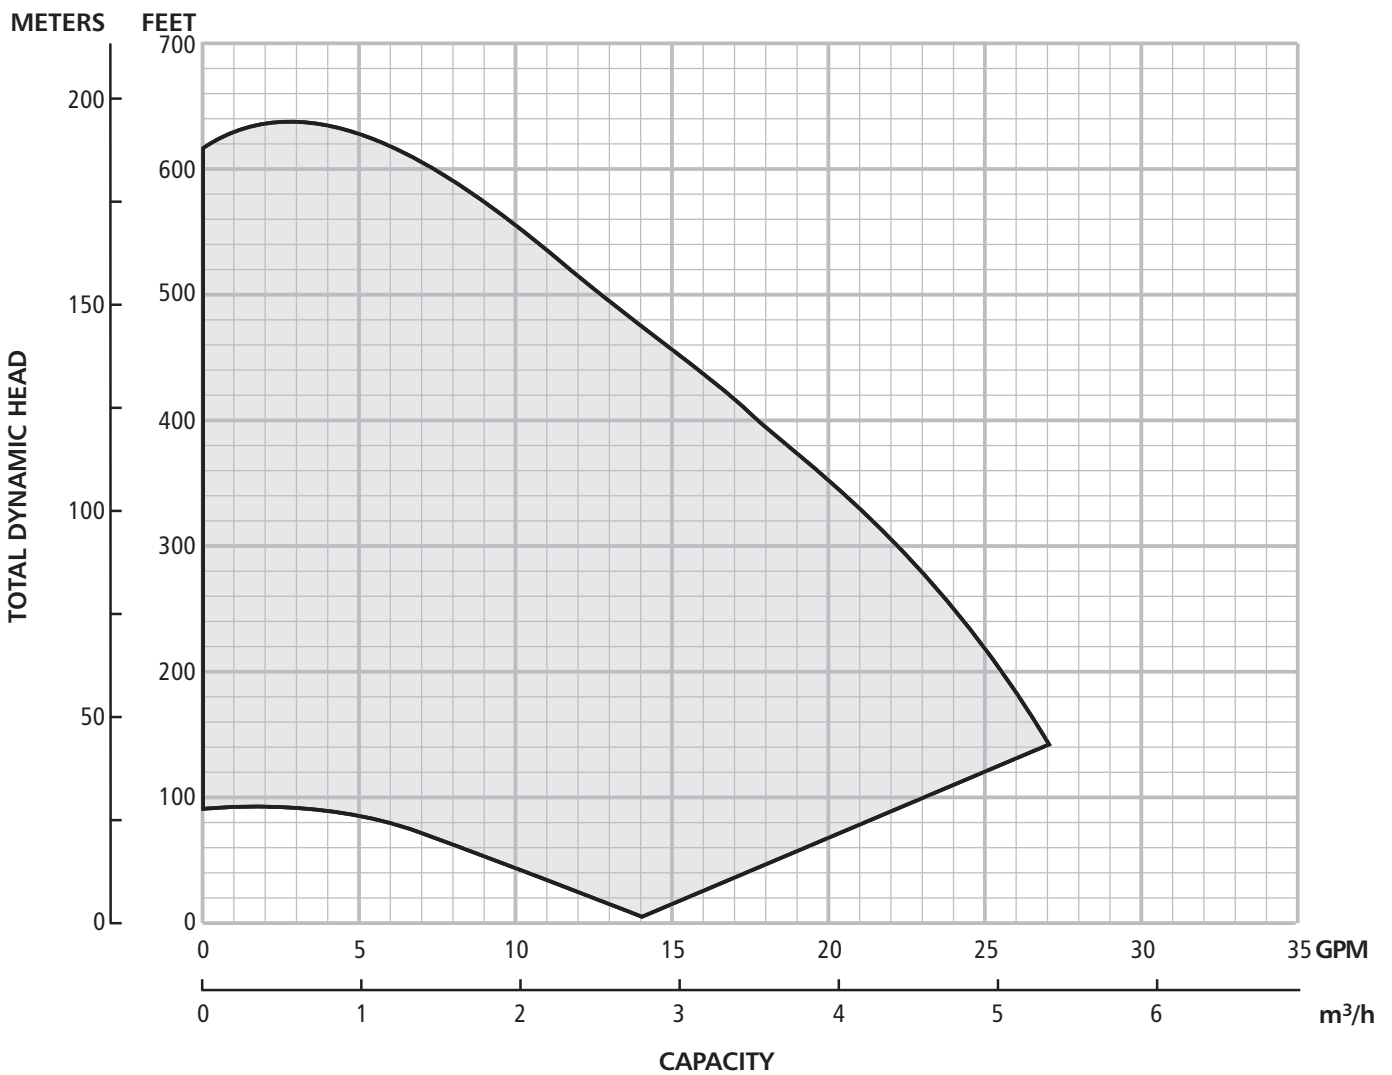

### MODEL 20S19 30–80 Hz with 5 HP Motor and BF50

#### SELECTION CHART


Pump Model	PSI	Depth to Water in Feet/Ratings in GPM (Gallons per Minute)																												
		60	80	100	120	140	160	180	200	220	240	260	280	300	340	380	420	460	500	540	580	620	660	700	740	780	820	860	900	940
20S19	0								27.0	26.7	26.3	26.1	25.8	25.6	24.8	23.9	23.0	22.0	21.2	20.0	18.9	17.8	16.7	15.5	14.6	13.5	12.4	11.3	10.2	9.0
	50				26.7	26.3	25.9	25.4	25.0	24.5	24.0	23.6	23.1	22.6	21.7	20.7	19.8	18.9	18.0	17.1	16.1	15.2	14.1	12.9	11.6	10.2	8.5	6.6	4.3	
	60		27.0	26.6	26.2	25.8	25.4	24.9	24.4	24.0	23.5	23.0	22.6	22.1	21.1	20.2	19.3	18.4	17.5	16.5	15.6	14.6	13.4	12.2	10.8	9.2	7.4	5.3		
	70	27.0	26.6	26.2	25.7	25.3	24.8	24.4	23.9	23.4	23.0	22.5	22.0	21.5	20.6	19.7	18.8	17.9	16.9	16.0	15.0	13.9	12.7	11.4	9.9	8.2	6.2			
Shut-off PSI		426	417	409	400	391	383	374	365	357	348	339	331	322	305	288	270	253	236	218	201	184	166	149	132	114	97	80	62	45

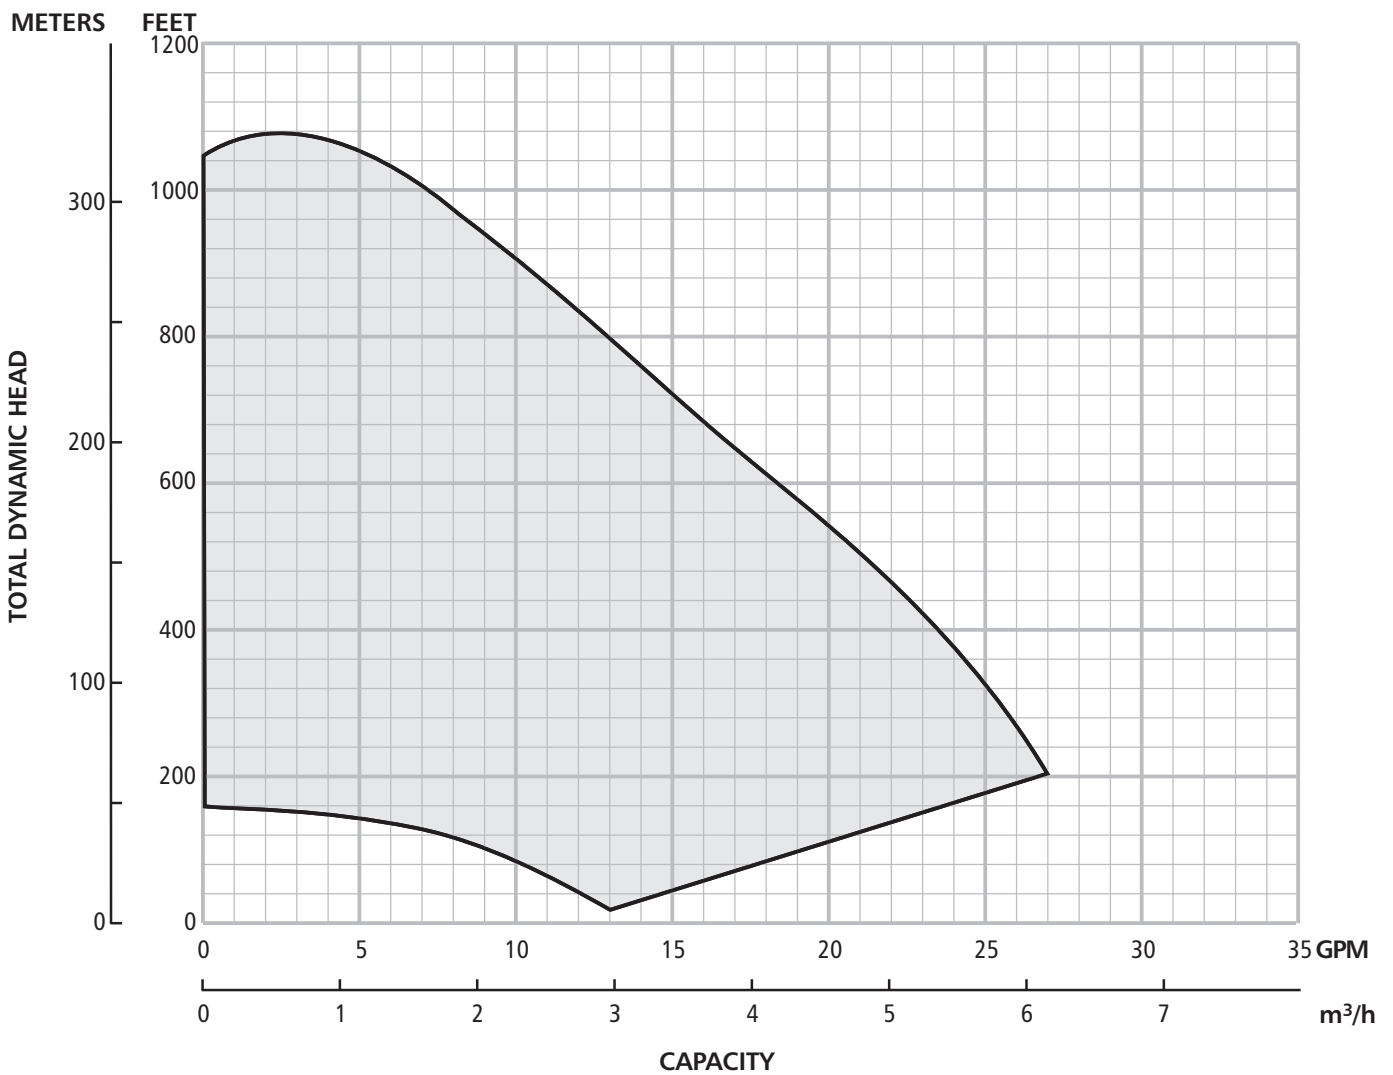

## MODEL 25S10 30–80 Hz with 3 HP Motor and BF30

### SELECTION CHART


Pump Model	PSI	Depth to Water in Feet/Ratings in GPM (Gallons per Minute)																		
		20	40	60	80	100	120	140	160	180	200	220	240	260	280	300	340	380	420	460
25S10	0									34.1	32.8	31.1	29.5	27.7	25.7	23.8	20.0	16.8	13.4	10.0
	50				33.3	31.4	29.4	27.5	25.6	23.9	22.2	20.6	19.1	17.6	16.1	14.6	10.9	5.9		
	60		34.9	33.0	31.1	29.1	27.2	25.4	23.6	21.9	20.4	18.9	17.4	15.9	14.3	12.6	8.2			
	70	34.6	32.7	30.8	28.8	26.9	25.1	23.3	21.7	20.1	18.6	17.2	15.7	14.1	12.3	10.2	4.9			
Shut-off PSI		218	209	201	192	184	175	166	158	149	140	132	123	114	106	97	80	62	45	28

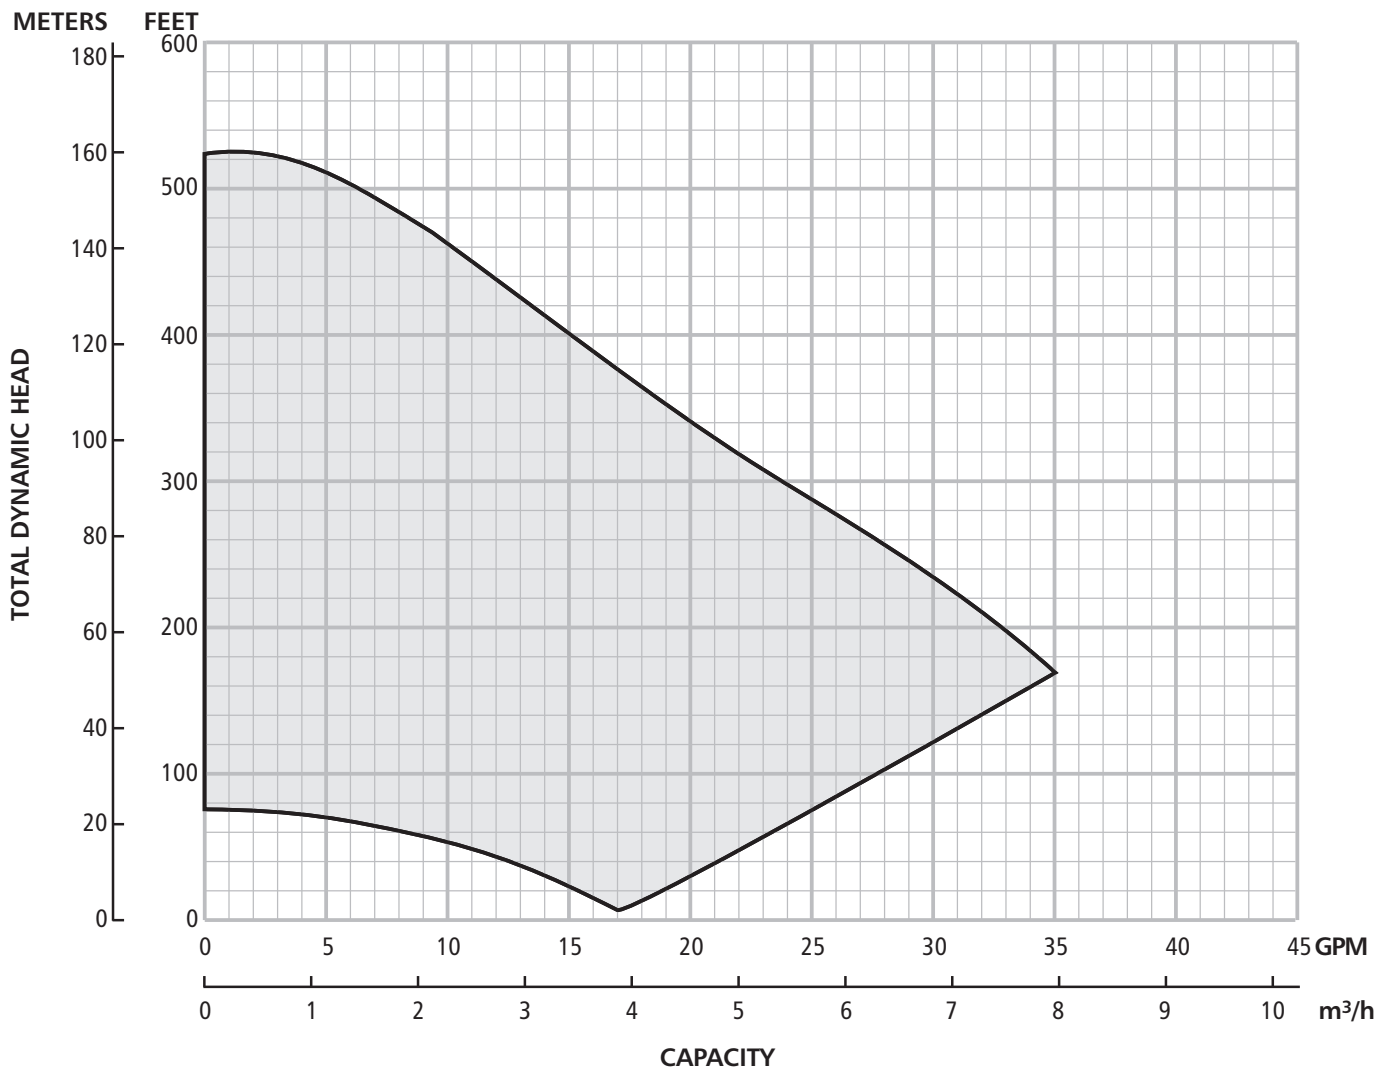

## MODEL 25S17 30–80 Hz with 5 HP Motor and BF50

### SELECTION CHART

Pump Model	PSI	Depth to Water in Feet/Ratings in GPM (Gallons per Minute)																				
		140	160	180	200	220	240	260	280	300	340	380	420	460	500	540	580	620	660	700	740	780
25S17	0									34.6	32.9	30.9	28.6	26.4	24.1	21.9	19.7	17.6	15.7	13.8	11.6	9.6
	50				34.3	33.2	32.0	30.8	29.7	28.5	26.2	24.1	22.1	20.2	18.4	16.5	14.6	12.5	9.9			
	60			34.1	33.0	31.8	30.7	29.5	28.3	27.2	25.0	22.9	21.0	19.1	17.3	15.4	13.4	11.0				
	70	35.0	33.9	32.8	31.6	30.5	29.3	28.2	27.0	25.9	23.8	21.8	19.9	18.1	16.2	14.3	12.1	9.5				
Shut-off PSI		318	309	300	292	283	274	266	257	248	231	214	196	179	162	144	127	110	92	75	58	41

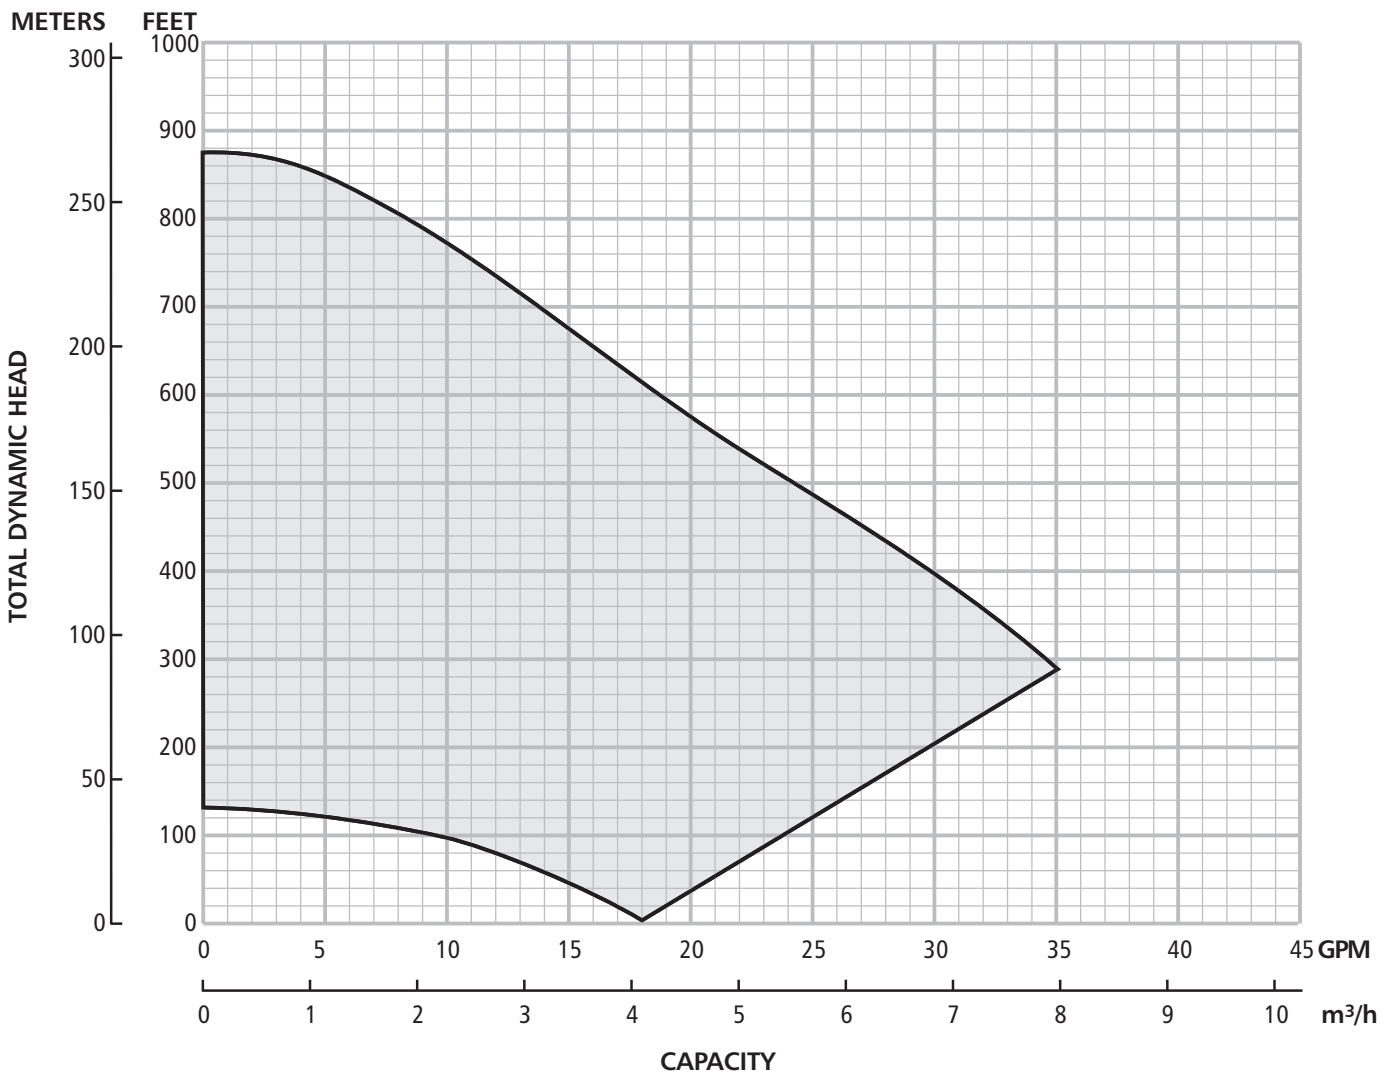

### WIRE SIZING – MAXIMUM CABLE LENGTHS IN FEET TO LIMIT VOLTAGE DROP TO 5% FOR 230 V SYSTEMS ⑤

#### Service Entrance to Controller

Controller Input	Motor HP	Copper Wire Size 75°C Insulation Exposed to a Maximum of 50°C (122°F) Ambient Temperature ⑥															
		14	12	10	8	6	4	2	1/0	2/0	3/0	4/0	250	300	350	400	500
230V 1 PH	1/2	366	583	925	1336	2107	3345	5267	8364								
	3/4	279	445	706	1020	1608	2552	4019	6383	8055							
	1	226	360	571	824	1300	2064	3250	5161	6513	8201						
	1 1/2	*	<b>286</b>	455	657	1036	1644	2589	4111	5188	6533	8236	9710				
	2	*	*	<b>331</b>	478	754	1197	1886	2995	3779	4759	5999	7073	8455	9852		
	3	*	*	<b>246</b>	355	561	890	1401	2225	2808	3536	4458	5256	6283	7321	8343	
5	*	*	*	<b>218</b>	<b>343</b>	545	858	1363	1720	2165	2730	3219	3847	4483	5109	6348	

#### Controller to Motor

Controller Output	Motor HP	Copper Wire Size 75°C Insulation Exposed to a Maximum of 50°C (122°F) Ambient Temperature ⑥														
		14	12	10	8	6	4	2	1/0	2/0	3/0	4/0	250	300		
230V 3 PH	1/2	905	1442	2290	3306	5213	8276									
	3/4	690	1100	1748	2523	3978	6316	9945								
	1	558	890	1413	2040	3216	5106	8041								
	1 1/2	445	709	1126	1625	2562	4068	6406								
	2	324	516	820	1184	1866	2963	4666	7410	9351						
	3	241	384	609	880	1387	2202	3467	5506	6949	8750					
5	*	235	373	539	849	1348	2123	3372	4255	5358	6755	7964	9520			

⑤ Reduce lengths by 13% for 200 V systems. ⑥ Lengths in bold require 90°C wire. Shading indicates 40° C maximum ambient. \* Wire does not meet the N.E.C. ampacity requirement.

The lengths in each of the Wire Sizing tables represent 100% of the allowable voltage drop when motor is running at full load. When sizing wire, the voltage drop of each wire segment must be included. The total must not exceed 100% of the allowable drop. Take for example a 1.5 HP motor with a distance from Service Entrance to Controller of 100' and 500' between the Controller and Motor.

- Service Entrance to Controller = 100' of 10 AWG (100/455) = 22 % (455' is from the S.E. to Controller chart)
  - Controller to Motor = 500' of 12 AWG (500/709) = 71 % (709' is from the Controller to Motor chart)
- Total Drop (must be ≤ 100%) 93 %

If the distance from the Controller to Motor was 600' (600/709) = 85% + 22% = 107%, we would need to use #10 wire for that segment, ex. 600/1126 = 53% + 22% (for 100' of #10) = 75% which is acceptable. It is also acceptable to use different wire sizes for the Buried and Well sections of wire.

## BALANCED FLOW DATA

### CONTROLLER, BREAKER, GENERATOR SIZING

3 Phase Motor HP	Voltage ①	Controller Model ②			Circuit Breaker ③	Generator ④ (VA)
		BF20	BF30	BF50		
3/4	230				15	2900
	200					
1	230				20	4400
	200					
1 1/2	230				30	6100
	200					
2	230				40	8100
	200					
3	230				50	13300
	200					

### SERVICE FACTOR AMPS 3 PHASE MOTORS

HP	230 Volt, 3Ø		200V, 3Ø	
	CentriPro SFA	Franklin SFA	CentriPro SFA	Franklin SFA
3/4	3.9	3.8	4.5	4.4
1	4.7	4.7	5.5	5.4
1 1/2	6.1	5.9	7.2	6.8
2	7.6	8.1	8.8	9.3
3	10.1	10.9	12	12.5
5	17.5	17.8	20.2	20.5

#### NOTES:

- ① Motor Nameplate must be the same as supply voltage.
- ② Shaded areas indicate which controller models can be used with which motors. Lighter shading indicates combinations where controller will limit peak performance to 85% of catalog value for pump/motor.
- ③ Circuit Breaker or Dual Element Time Delay Fuse Size (Amps) protecting branch circuit supplying controller.
- ④ Minimum size of single phase 240 V generator required.

### THREE PHASE, 4", MOTOR DATA

#### Electrical Data, 60 Hertz, 3450 RPM, 4" Motors

CentriPro #	Red Jacket #	HP	kW	Volts	SF	Full Load		Service Factor		Locked Rotor Amps	Line - Line Resistance
						Amps	Watts	Amps	Watts		
M07430	75C323	0.75	0.55	200	1.5	3.8	812	4.5	1140	32	2.6-3.0
M10430	100C323	1	0.75		1.4	4.6	1150	5.5	1500	29	3.4-3.9
M15430	150C323	1.5	1.1		1.3	6.3	1560	7.2	1950	40	1.9-2.5
M20430	200C323	2	1.5		1.25	7.5	2015	8.8	2490	51	1.4-2.0
M30430	300C323	3	2.2		1.15	10.9	2890	12.0	3290	71	0.9-1.3
M50430	500C323	5	3.7		1.15	18.3	4850	20.2	5515	113	0.4-0.8
M07432	75C313	0.75	0.55	230	1.5	3.3	850	3.9	1185	27	3.3 - 4.3
M10432	100C313	1	0.75		1.4	4.0	1090	4.7	1450	26.1	4.1-5.1
M15432	150C313	1.5	1.1		1.3	5.2	1490	6.1	1930	32.4	2.8-3.4
M20432	200C313	2	1.5		1.25	6.5	1990	7.6	2450	44	1.8-2.4
M30432	300C313	3	2.2		1.15	9.2	2880	10.1	3280	58.9	1.3-1.7
M50432	500C313	5	3.7		1.15	15.7	4925	17.5	5650	93	.85-1.25

#### Diaphragm Tank Sizing and Pre-Set Pressure Recommendations:

Diaphragm type (captive air) tanks are required on these systems.

**Table 1: Tank Sizing Selection**

Maximum Pump GPM	Recommended Tanks		
	Total Volume	Order No.	or Order No.
10	2	V6P	TP6P
23	4.5	V15P	TP15P
41	8.2	V25P	TP25P
70	13.9	V45	TP45
100	19.9	V60	TP60

Use Total Tank Volume, not drawdown volume, to select the proper tank size. The total tank volume should be approximately 20% of the pump's maximum flow. For example, when using a 10 gpm pump the system requires a minimum 2 gallon (total volume) tank.

The tank sizing recommendations are field proven to prevent objectionable pressure drops on start-up and provide smooth operation for the majority of variable speed pump systems.

Set the tank pressure, while tank is empty of water, to 20 psi below the desired system pressure setting. Ex. for a 50 psi system pressure, charge the tank to 30 psi.



ITT

2881 East Bayard Street, Seneca Falls, NY 13148

Phone: (315) 568-7123 • Fax: (315) 568-7973

[www.redjacketwaterproducts.com](http://www.redjacketwaterproducts.com)

Red Jacket Water Products is a registered trademark of ITT Corporation. ITT, the Engineered Blocks Symbol and Engineered for Life are registered trademarks of ITT Manufacturing Enterprises, Inc.

Noryl and Lexan is a registered trademark of GE Plastic.

Copyright © 2010 ITT Corporation BPROPAKRJ March, 2010 Printed in U.S.A.  
SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

